


JOB:
 LOCATION:
 ARCHITECT:
 MECH ENG:
 CONTRACTOR:
 DATE:

EFL Series Electra-Flow

Linear Slot Diffuser Electronically Actuated



Dimensions

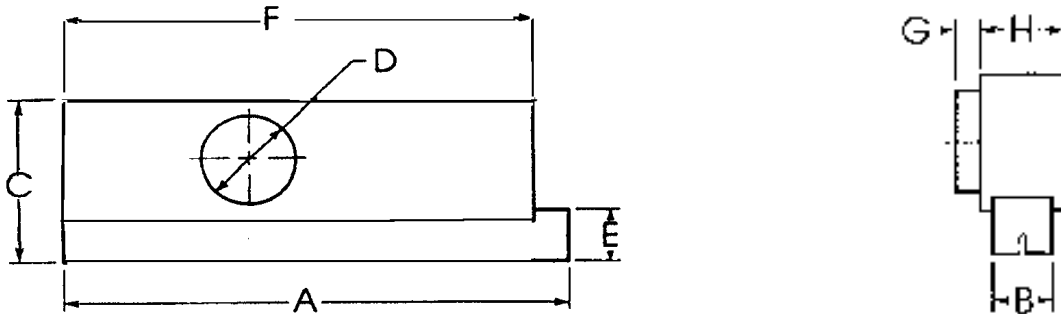

MODEL	A	B	C	D	E	F	G	H
EFL-241	23.75	2.5	15.5	8,10	5.125	21.25	2.0	4.375
EFL-242	23.75	5.25	15.5	8,10	5.125	21.25	2.0	7.250
EFL-243	23.75	8.0	15.5	8,10*	5.125	21.25	2.0	10.00
EFL-481	47.75	2.5	15.5	8,10	5.125	45.25	2.0	4.375
EFL-482	47.75	5.25	15.5	8,10	5.125	45.25	2.0	7.25
EFL-483	47.75	8.0	15.5	8,10*	5.125	45.25	2.0	10.00
*10" inlet oval								

FEATURES :

Construction: 24 ga. electro galvanized steel
 1/2"-2 lb. matte insulation

Controls: 120/230/277/460 vac 40/75 watt
 primary power-24 vac secondary
 power

Thermostat: Range: 55 to 85 degree F.
 Proportional 2 degrees F
 Band:
 Action: Cooling direct
 acting-Heating
 reverse acting

Models VAV Cooling only and
 VAV cooling
 Available: & VAV heating

Accessories: Additional Frames-
 Surface mount, spline, and
 fine line

Finsh: White