



JOB:
 LOCATION:
 ARCHITECT:
 MECH ENG:
 CONTRACTOR:
 DATE:

VFL Series Vari-Flow

Linear Diffuser

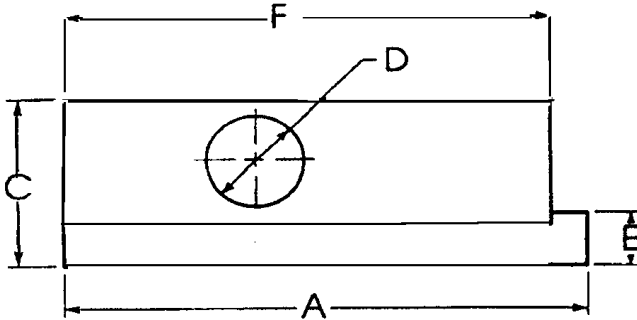

MODEL	A	B	C	D	E	F	D	E
VFL-241	23.75	2.5	15.5	8,10	5.125	21.25	2.0	4.375
VFL-242	23.75	5.25	15.5	8,10	5.125	21.25	2.0	7.250
VFL-243	23.75	8.0	15.5	8,10*	5.125	21.25	2.0	10.000
VFL-481	47.75	2.5	15.5	8,10	5.125	45.25	2.0	4.375
VFL-482	47.75	5.25	15.5	8,10	5.125	45.25	2.0	7.250
VFL-483	47.75	8.0	15.5	8,10*	5.125	45.25	2.0	10.000

FEATURES :


Construction: 24 ga. electro galvanized steel
 1/2"-2 lb. matte insulation

Controls: Self Contained-Thermally
 actuated

Models Available: 1, 2 slot, 2 & 4 ft. , 1 & 2
 way discharge pattern

Accessories: Warm-Up feature
 /Options Additional Frames-Surface
 mount, spline, and fine line

Finish: White

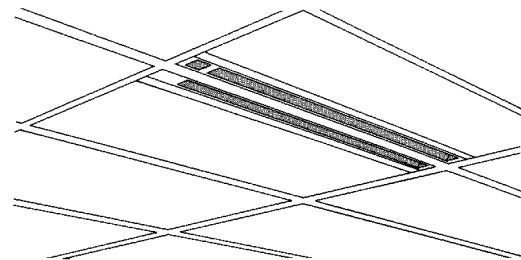

Form No. VFL94-161/Eff.Date: 10/97